


**Technical Specifications**

<b>Nominal voltage</b>	12 V
<b>Nominal capacity (1.70V/c, 25°C)</b>	20Hr: 2.60 Ah 5Hr: 2.25 Ah 1Hr: 1.62 Ah
<b>Internal resistance</b>	≤42mΩ (fully charged)
<b>Maximum charge current</b>	0.78 A
<b>Maximum discharge current</b>	39 A (max. 5 sec)
<b>Float use / cyclic use</b>	13.6 - 13.8V / 14.5 - 14.9V
<b>Charge temperature range</b>	-10°C ~ 50°C
<b>Discharge temperature range</b>	-15°C ~ 50°C
<b>Design life (20°C)</b>	3-5 years (Eurobat)
<b>Standard terminal</b>	Faston 4.8mm (T1)
<b>Housing material</b>	ABS (UL94-HB)
<b>Dimensions Length</b>	178 mm
<b>Dimensions Width</b>	34 mm
<b>Dimensions Height</b>	66 mm
<b>Approximate Weight</b>	0.92 kg
<b>Packing</b>	8 pcs / box

**Typical applications**

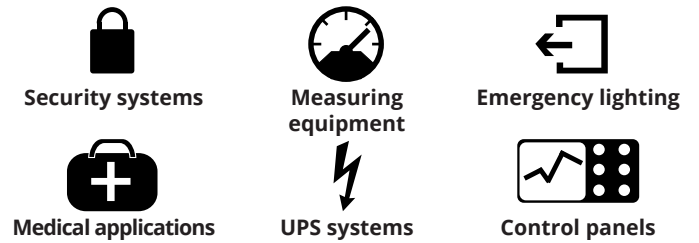

**Features**

- Absorbent Glassmat Technology (AGM)
- Valve Regulated Lead Acid (VRLA)
- Maintenance free
- UL94-HB Flame retardant casing
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while terminals are downwards

**Constant Current Discharge (Amps) at 25°C (77°F)**


F.V/TIME	5 Min	10 Min	15 Min	30 Min	60 Min	2 Hr	5 Hr	10 Hr	20 Hr
1.80V/cell	8.30	5.24	4.25	2.46	1.54	0.87	0.43	0.24	0.13
1.75V/cell	8.79	5.55	4.49	2.55	1.59	0.90	0.44	0.24	0.13
1.70V/cell	9.19	5.80	4.64	2.62	1.62	0.91	0.45	0.24	0.13
1.65V/cell	9.58	6.05	4.82	2.70	1.66	0.92	0.45	0.24	0.13
1.60V/cell	9.88	6.24	4.94	2.76	1.69	0.92	0.45	0.25	0.13

**Constant Power Discharge (Watts) per Cell\* at 25°C (77°F)**


F.V/TIME	5 Min	10 Min	15 Min	30 Min	60 Min	2 Hr	5 Hr	10 Hr	20 Hr
1.80V/cell	15.4	9.85	8.07	4.70	2.97	1.70	0.85	0.47	0.255
1.75V/cell	16.4	10.4	8.52	4.88	3.07	1.75	0.88	0.48	0.260
1.70V/cell	17.2	10.9	8.82	5.00	3.13	1.77	0.89	0.49	0.262
1.65V/cell	17.8	11.4	9.17	5.17	3.22	1.78	0.89	0.49	0.263
1.60V/cell	18.3	11.7	9.38	5.27	3.27	1.80	0.90	0.49	0.263

\*: Battery consists of 6 cells


**Service life vs Temperature**

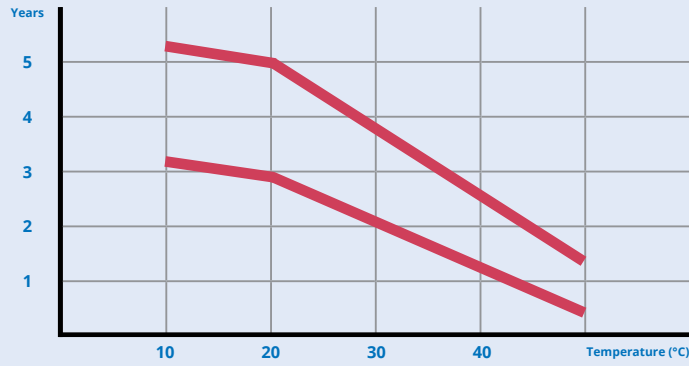


**Self-discharge characteristics**

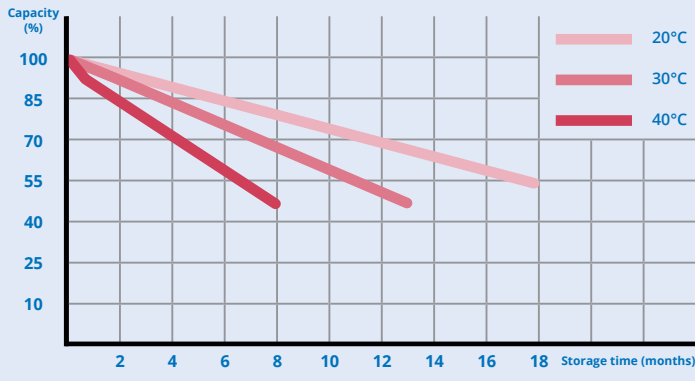

**Charge Voltage vs Temperature**

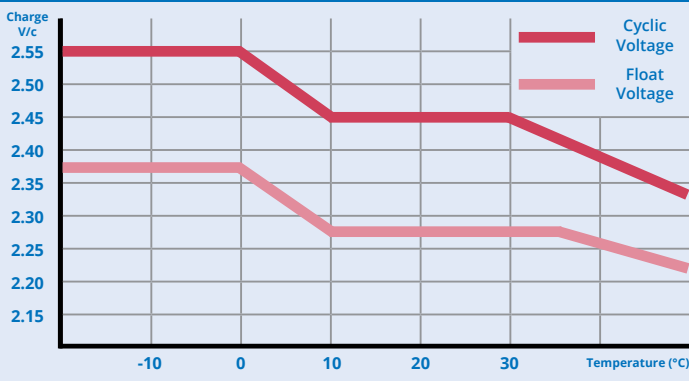

**Discharge characteristics**

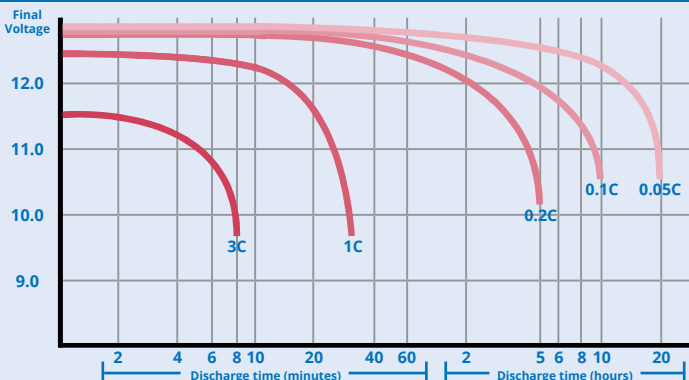

**Certifications and Standards**

**ISO ISO ABS**  
9 0 0 1 14001 UL94-HB



**General purpose series**

With a range of well over 50 models, pbq offers one of the widest selections in the battery industry. The batteries are designed with the cost and quality conscious user in mind offering an excellent price/performance ratio. pbq has a full series of 6 and 12 Volt models available for a wide range of applications and intends to keep this range in production for many years to come. These General Purpose batteries have been designed for a functional life of 4-5 years at an operating temperature of 25°C in a standby application.

**VdS approved VRLA batteries**

The VdS-approved pbq batteries form a special range that has been tested and qualified by the German VdS institute. The concept behind VdS recognition; ensuring tested and certified quality in the products and services being offered in the safety and security markets, is of equally advantageous for user and supplier. All VdS models are accomplished in Flame Retardants ABS casing. Due to the right choice of the flame retardant, the batteries remain RoHS Compliant.

Model	Voltage (V)	Capacity (Ah)	Dimensions lwxwxh (mm)	Weight (kg)
pbq 3.5-4	4	3.5	90x34x66	0.44
pbq 1.2-6	6	1.2	97x24x58	0.28
pbq 3.2-6	6	3.2	134x35x67	0.60
pbq 4.5-6	6	4.5	70x47x107	0.72
pbq 7-6	6	7.0	151x34x100	1.15
pbq 12-6	6	12.0	151x50x100	1.75
pbq 0.8-12	12	0.8	96x25x62	0.40
pbq 1.2-12*	12	1.2	97x43x58	0.52
pbq 1.3-12	12	1.3	97x48x57	0.56
pbq 2.3-12*	12	2.3	178x35x67	0.90
pbq 2.6-12	12	2.6	178x34x66	0.92
pbq 2.6-12S	12	2.6	70x48x104	0.80
pbq 2.9-12	12	2.9	79x56x105	1.05
pbq 3.2-12*	12	3.2	134x67x67	1.30
pbq 3.4-12	12	3.4	134x67x67	1.30
pbq 4-12	12	4.0	195x47x76	1.45
pbq 5.2-12	12	5.2	90x70x107	1.62
pbq 7-12*	12	7.0	151x65x102	2.20
pbq 7-12L*	12	7.0	151x65x102	2.20
pbq 12-12*	12	12.0	151x98x98	3.75
pbq 18-12*	12	18.0	181x76x167	5.60
pbq 26-12*	12	26.0	166x175x125	9.30
pbq 28-12T2	12	28.0	165x125x175	8.60
pbq 40-12*	12	40.0	197x165x170	12.80
pbq 65-12*	12	65.0	350x167x179	20.80

\*: VdS approved VRLA batteries